



Project:	Type:	QTY:
Product Code:		

5"



Product Code

IP53 - SFL5SD - TRIM COLOR - INTENSITY - VOLTAGE

W*=White WW30*=3000K 120=120V, AC
 A =Aluminum NW40 =4000K
 CC =Custom Color

Note: * Components usually in-stock for quick assembly and shipping.

Features + Specifications

Intended Use:

- Building interior
- Building exterior (ceiling recessed only)
- Damp location listed
- IC rated, approved and tested for direct contact with insulation materials

Construction:

- Die-cast aluminum one piece trim frame with built-in heat sink
- Opal PMMA lens with light glide technology for even light distribution
- Full metal top plate protects LED PCB
- Heavy duty installation springs ensure tight fitting to ceiling

Finish:

- W = Powder coat painted
- A = Anodized aluminum
- CC = Powder coat painted

Optical System:

- High brightness 2835 SMDs with LM80 certificate **9W**
- ***WW30 = 3000K CCT, 900 lumens** minimum with 80+ CRI
- Optional CCT color NW40 also available (This CCT might require minimum quantities with longer lead time)
- L70 @ 50000hrs for ambient temperature <25°C, 35000hrs >25°C
- PCB made from laminated heavy gauge copper materials




Electrical System:

- Constant current driver technology
- 120V line voltage dimmable with most dimmers
- Overheat protected, RoHS compliant

DRIVER BOX NOTE:

Driver box has 175 cm³ (mL), (10.67 in³) of free wiring space inside. Will accommodate up to MAXIMUM 4 No. 12 AWG wires

Installation hole cut out size: 5-1/8" sq.

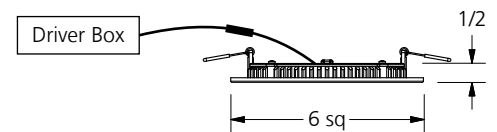

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com



Right reserved for material and spec modification without prior notice.

Datecode 20170307

Warranty - Up To 3 Years