



Project:	Type:	QTY:
Product Code:		

Product Code

IP54 - 116510 -	COLOR	LAMP	VOLT	HEIGHT	OPTIONS
	B =Black	6W3K =3200K	120=120V	20H=20" High	GFI =GFI outlet
	A =Aluminum	6W6K =6000K	277=277V	32H=32" High	RBK =Railing Bracket(s)
	G =Dark Grey	12W3K=3200K	347=347V		
	W =White	12W6K=6000K			
	CC=Custom Color	18W3K=3200K			
		18W6K=6000K			

Features + Specifications

Intended Use:

- Walkway, pathway, landscape lighting
- Interior and exterior
- Wet location listed

Construction:

- Die-cast aluminum bollard head
- Opal high-impact acrylic lens
- Extruded aluminum bollard tube
- Die-cast aluminum base plate with 1/2" stainless steel anchor bolts
- Optional railing bracket(s), GFI outlet(s)

Finish:

- Powder coat paint


Optical System:

- High power LED 50000+ hrs L70 rating
- 3200K or 6000K CCT with 70+ CRI
- 6W = 80 lm/LED Watt
- 18W = 100 lm/LED Watt
- 360 degrees symmetrical distribution

Electrical System:

- HPF high efficiency electronic driver
- Cold temperature rated
- RoHS compliant
- Feed-thru quick wire terminal block
- Copper ground lug accepts up to #6 AWG ground wire (great for around pools, ponds and streams)
- Optional GFI outlet available (120V only)

Lamp Info Table		
Lamp Code	Rated Lumens	Perceived Lumens
6W3K	480	575
6W6K	550	660
12W3K	960	1150
12W6K	1100	1320
18W3K	1800	2250
18W6K	2100	2600

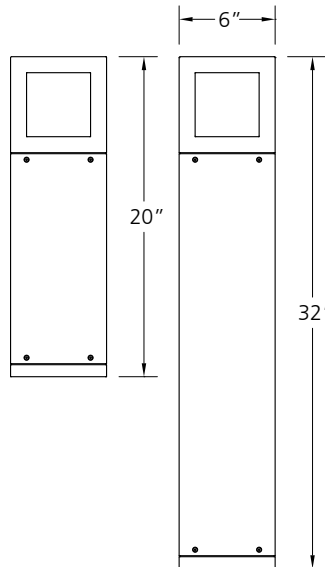

Light of Your World



www.iplighting.com

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



Right reserved for material and spec. modification without prior notice.

Datecode 20130622

Warranty - Up To 3 Years