



Project:	Type:	QTY:
Product Code:		

Ø4"



Product Code

IP54 - RCL4 - INTENSITY	VOLTAGE	OPTION
WW27 =2700K CCT, 550 lm	120 =120V	125TCA=1.25" thick ceiling adaptor
WW30* =3000K CCT, 555 lm	UNV2=277/347V	
WW35 =3500K CCT, 570 lm		
NW =4100K CCT, 590 lm		
BW =5500K CCT, 610 lm		

Note: * Components usually in stock for quick assembly and shipping.

Features + Specifications

Intended Use:

- Building interior/exterior, new construction
- **Ø4"** Ceiling recessed mount
- **Low profile recessed housing only 3-1/2" high**
- Approved for IC and AT application
- Ideal for Residential + Light commercial use
- Wet location listed

Construction:

- Die cast aluminum one piece trim/reflector
- Trim powder coat painted low gloss white
- Low profile clear specular reflector ring
- PMMA frosted opal lens

Optical System:

- High brightness Samsung LM561B SMDs with LM80 certificate **5W** >110 lm / LED watt
- ***WW30 = 3000K CCT, 555 lumens** minimum with 80+ CRI
- Optional CCT color WW27, WW35, NW & BW also available (These CCT might require minimum quantities with longer lead time)
- Laminated aluminum PCB for effective heat management
- PMMA frosted opal lens with specular cone for glare control
- 120° symmetrical light distribution
- Ideal for general lighting application
- Fits up to 3/4" thick ceiling materials
- Optional factory installed 1-1/4" thick ceiling adaptor




Electrical System:

- Constant current driver technology
- HPF and High Efficiency circuitry
- RoHS compliant
- Short circuit and Overheat protected
- 120V Line voltage dimmable
- Recessed housing "feed-thru wiring" rated

Accessories:

- Use with recessed housing IP00-RCL4HSG
- Recessed housing fits 16" and 12" center spacing without mounting bars
- HB24 (24" long mounting bar set)

Recessed Housing IC/AT Listed

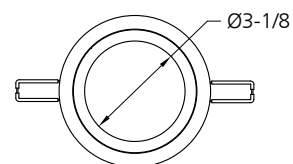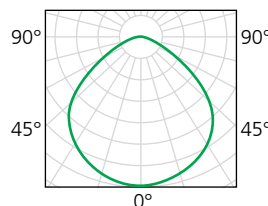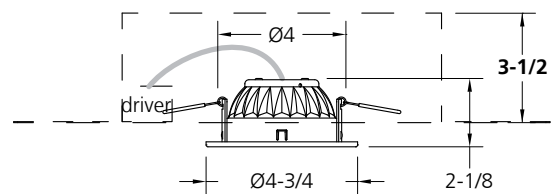

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com

Light of Your World



Right reserved for material and spec modification without prior notice.

Datecode 20150130

Warranty - Up To 5 Years