



Project:	Type:	QTY:
Product Code:		



Right reserved for material and spec. modification without prior notice.

Product Code

IP55 - 111010 -	COLOR	HEIGHT	INTENSITY	VOLT	OPTIONS
	B =Black	36	12W3K	120	OPL =Opal Lens
	W =White	42	12W4K	277	HSS =House Side Shield
	A =Aluminum		12W5K	347	SP =Surge Protector
	G =Grey		24W3K		GFIR =120V GFI Receptacle
	CC=Custom Color		24W4K		CAL =Chain Attachment Loop(s)
			24W5K		RBKT=Railing Bracket(s)

Features + Specifications

Intended Use:

- Walkway, pathway, landscape lighting
- Building interior/exterior, wet location listed

Construction:

- Made from aluminum extrusion
- Miter cut and precision welded joints
- Clear PMMA lens standard, optional Opal lens available

Finish:


- Sand textured powder coat paint
- Color in Black, White, Aluminum and Grey
- Custom color available

Optical System:

- Symmetrical optics made from Samsung mid power SMDs
- 100 lumens/LED watt minimum
- CCT available in 3500K, 4100K & 5000K with minimum 80 CRI
- Clear PMMA lens standard, optional Opal Lens available

Electrical System:

- HPF + High Efficiency constant current drivers
- Optional surge protection device available
- Overload, overheat and short circuit protected
- RoHS compliant

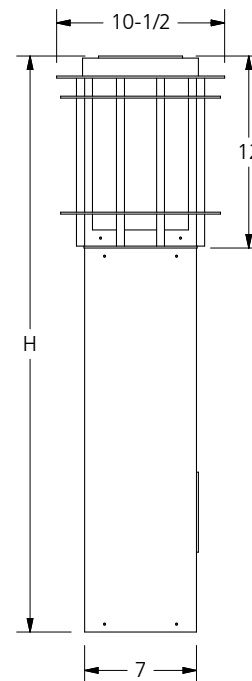

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com



Datecode 20150425

Warranty - Up To 3 Years