




Project:	Type:	QTY:
Product Code:		

## Product Code

IP55 - 501010 -	COLOR	SIZE	INTENSITY	DIST	VOLT	OPTIONS
	B =Black	S	12W3K	SY =Symmetrical	120	OPL=Opal Lens
	W =White		12W4K	WY=Walkway	277	HSS=House Side Shield
	A =Aluminum		12W5K	RW=Roadway	347	SP =Surge Protector
	CC=Custom Color		18W3K			
			18W4K			
			18W5K			
		M	24W3K			
			24W4K			
			24W5K			
			36W3K			
			36W4K			
			36W5K			
		L	45W3K			
			45W4K			
			45W5K			
			60W3K			
			60W4K			
			60W5K			

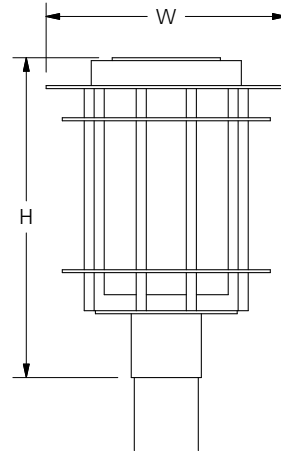

Size	W	H
S	10-1/2"	14-1/2"
M	14-1/2"	17-1/2"
L	20"	24"

## Features + Specifications

### Intended Use:

- Building interior/exterior, wet location listed
- Slip fitter for pole top mount or arm bracket mount

### Construction:

- Made from aluminum extrusion
- Miter cut and precision welded joints
- Clear PMMA lens standard, optional Opal lens available

### Finish:

- Sand textured powder coat paint
- Color in Black, White and Aluminum
- Custom color available

### Optical System:

- Symmetrical optics made from Samsung mid power SMDs
- Walkway and Roadway optics made from Cree high power LEDs
- 135 lumens/LED watt for SY optics and 95 lumens/LED watt for WY + RW optics
- CCT available in 3500K, 4100K and 5000K with minimum 70 CRI
- Clear PMMA lens standard for all optics, Opal Lens available for SY optics only

### Electrical System:


- HPF + High Efficiency constant current drivers
- Optional surge protection device available
- Overload, overheat and short circuit protected
- RoHS compliant

### Mounting:

- Slip fitter mounts over open pole end
- Fits over 3" SQ OD for size S and 4" SQ OD for size M + L
- Arm mounting bracket for pole and wall mounting brackets are available

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components

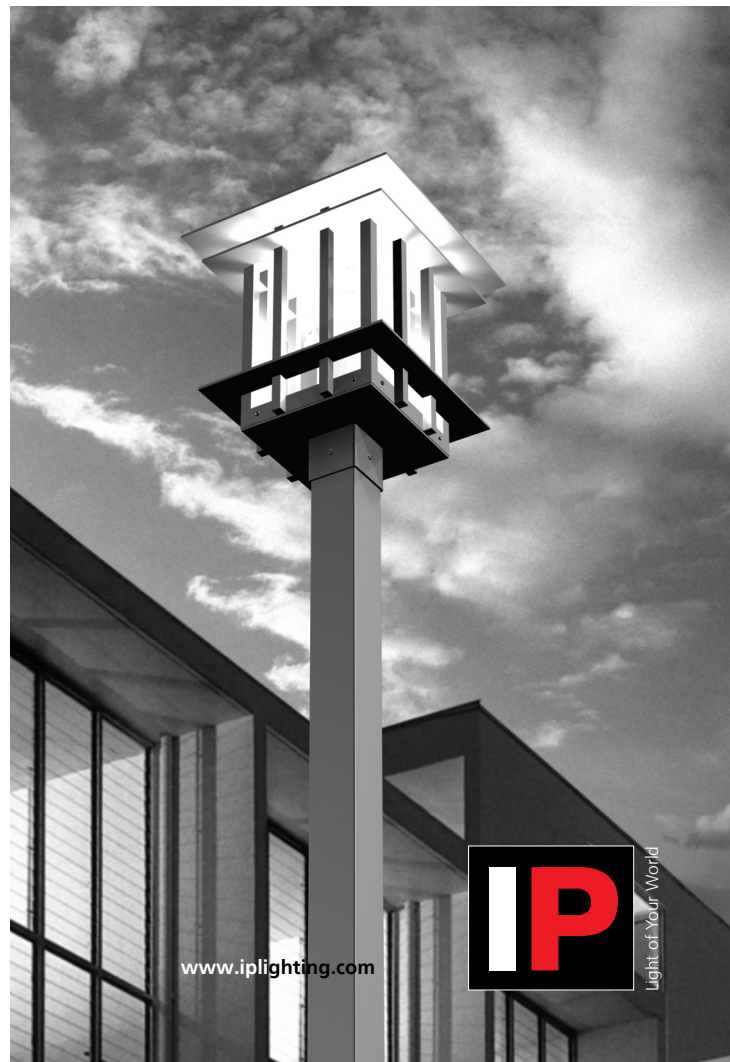

www.iplighting.com



Light of Your World

Right reserved for material and spec. modification without prior notice.

Datecode 20160506

Warranty - Up To 3 Years