



Project:	Type:	QTY:
Product Code:		

Product Code

IP55	-	504000	-	COLOR	-	LAMP	-	VOLTAGE
				B =Black		24W4K		120=120V
				W =White		36W4K		277=277V
				A =Aluminum				347=347V
				CC=Custom Color				

Features + Specifications

Intended Use:

- Building exterior

Construction:

- Die cast aluminum body
- Die cast aluminum lens frame
- Clear tempered glass lens
- Silicone gaskets
- Stainless steel fastener

Finish:

- Powder coat paint

Optical System:





- Professional design optical lens
- 135° x 75° Elliptical light distribution
- 100+ lumens per watt
- 4000K CCT with 75+ CRI
- 10 to 12ft ideal mounting height
- 2.0 mounting height to spacing ratio
- Ideal for walkway and building perimeter

Electrical System:

- Constant current driving technology
- HPF with High Efficiency circuit design
- Cold temperature rated

Mounting:

- Direct mount over 3" OD round pole
- Poles available, please check our pole section
- Wall bracket mounting also available
- Ideal mounting height 10ft to 12ft

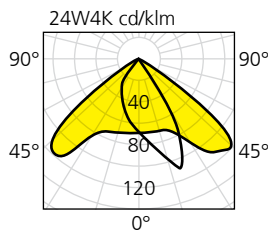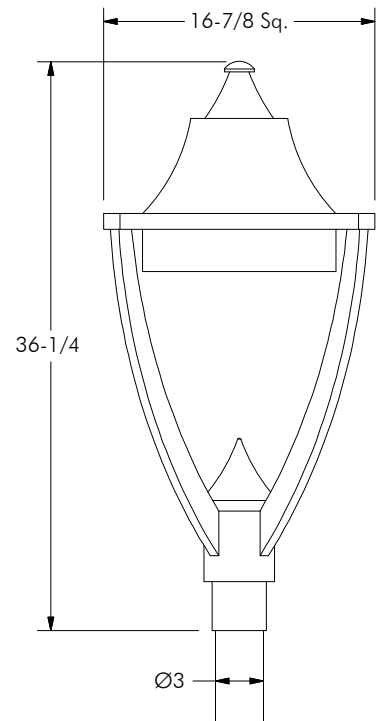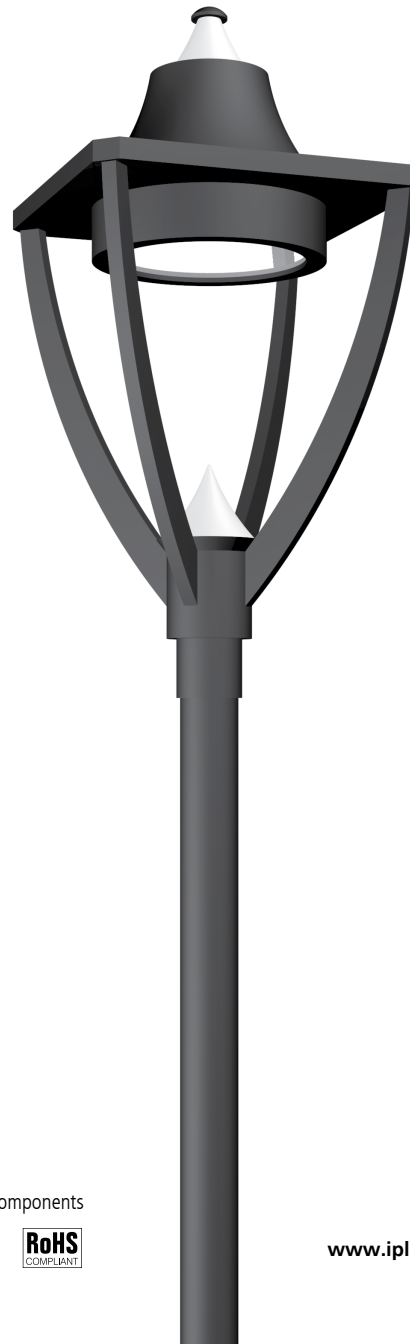

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com



Right reserved for material and spec. modification without prior notice.

Datecode 20160506

Warranty - Up To 3 Years