

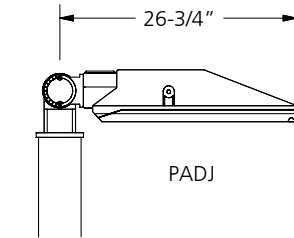
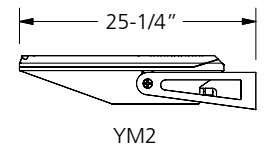
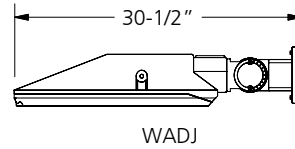
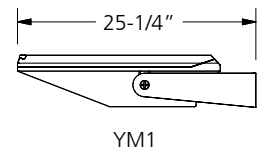
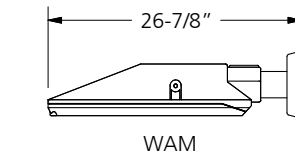


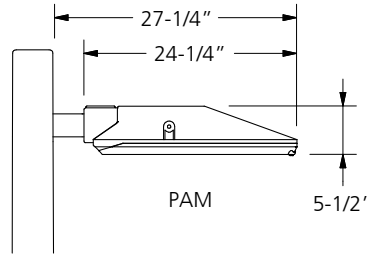

Project:	Type:	QTY:
Product Code:		

Product Code

IP65 - 517035 -	COLOR	LAMP	VOLTAGE	OPTIONS
	B =Black	60W35K	120 =120V	PAM =Pole Arm Mount
	W =White	60W4K	277 =277V	PADJ =Pole Adjustable Mount
	A =Aluminum	60W5K	347 =347V	WAM=Wall Arm Mount
	CC=Custom Color	90W35K	120C=120V + 0~10 Control	WADJ=Wall Adjustable Mount
		90W4K	277C=277V + 0~10 Control	YM1 =Yoke Mount 1
		90W5K	347C=347V + 0~10 Control	YM2 =Yoke Mount 2
		120W35K		
		120W4K		
		120W5K		

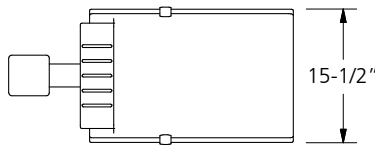

Features + Specifications

Intended Use:

- Building Interior + Exterior
- Wet location listed

Construction:

- Die cast aluminum housing + lens frame
- IP65 rated with extruded silicone gaskets
- Clear tempered glass lens
- Stainless steel fasteners

Finish:

- Powder coat paint in Black, White + Aluminum

Optical System:

- Hi power Cree XTE with LM80/TM21, L70@65000hrs
- Hi quality optical lens with 120° x 60° beam spread
- 100 lm – 130 lm per watt efficacy, 70 – 80 CRI
- All aluminum heavy gauge PCB for fast even heat distribution
- Design for Roadway or Parking lot application
- 60W35K=6000lm, 60W4K=7320lm, 60W5K=7800lm
- 90W35K=9000lm, 90W4K=10980lm, 90W5K=11700lm
- 120W35K=12000lm, 120W4K=14640lm, 120W5K=15600lm

Electrical System:

- Constant Current drive technology
- HPF, Hi-Efficiency, RoHS compliant
- Over heat, Short circuit with 4KV surge protection
- System watt of 70W, 106W and 140W

Mounting:

- Ideal mounting height is 16ft to 25ft
- Multiple mounting options
- Poles and special mounting brackets and arm also available

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com

Light of Your World



Right reserved for material and spec. modification without prior notice.

Datecode 20160508

Warranty - Up To 3 Years