



Project:	Type:	QTY:
Product Code:		

Ø8"



**Product Code**

**IP54 - RCL8 - INTENSITY - VOLTAGE - OPTION**

WW27 =2700K CCT, 1685 lm  
**WW30\***=3000K CCT, 1725 lm  
 WW35 =3500K CCT, 1755 lm  
 NW =4100K CCT, 1825 lm  
 BW =5500K CCT, 1890 lm

120 =120V  
 UNV2=277/347V

125TCA=1.25" thick ceiling adaptor

Note: \* Components usually in stock for quick assembly and shipping.

**Features + Specifications**

**Intended Use:**

- Building interior/exterior, new construction
- Ø8" Ceiling recessed mount
- Low profile recessed housing
- Approved for IC and AT application
- Ideal for Residential + Light commercial use
- Wet location listed

**Construction:**

- Die cast aluminum one piece trim/reflector
- Trim powder coat painted low gloss white
- Low profile clear specular reflector ring
- PMMA frosted opal lens

**Optical System:**



- High brightness Samsung LM561B SMDs with LM80 certificate **16W** >110 lm / LED watt
- **\*WW30 = 3000K CCT, 1725 lumens** minimum with 80+ CRI
- Optional CCT color WW27, WW35, NW & BW also available (These CCT might require minimum quantities with longer lead time)
- Laminated aluminum PCB for effective heat management
- PMMA frosted opal lens with specular cone for glare control
- 120° symmetrical light distribution
- Ideal for general lighting application
- Fits up to 3/4" thick ceiling materials
- Optional factory installed 1-1/4" thick ceiling adaptor

**Electrical System:**

- Constant current driver technology
- HPF and High Efficiency circuitry
- RoHS compliant
- Short circuit and Overheat protected
- 120V Line voltage dimmable
- Recessed housing "feed-thru wiring" rated

**Accessories:**

- Use with recessed housing IP00-RCL8HSG
- Recessed housing fits 16" and 12" center spacing without mounting bars
- HB24 (24" long mounting bar set)

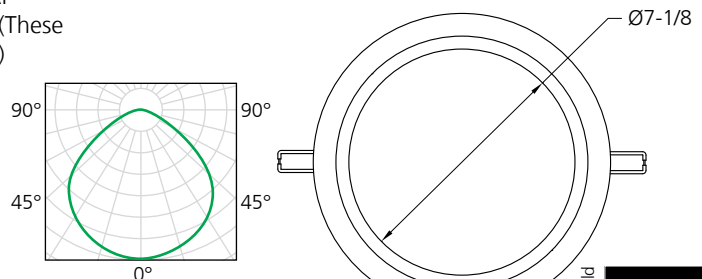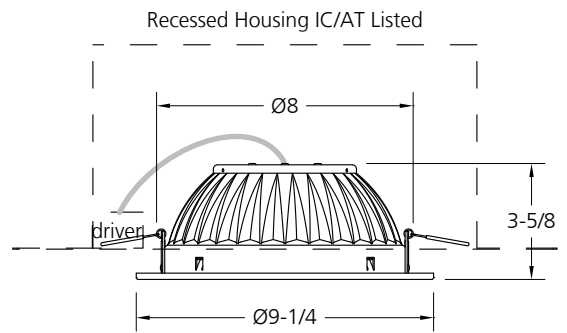

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com



Right reserved for material and spec. modification without prior notice.

Datecode 20150130

Warranty - Up To 5 Years