



Ø4"

| | | |
|---------------|-------|------|
| Project: | Type: | QTY: |
| Product Code: | | |



Product Code

| | | | | | | | | | | |
|-------------|---|---------------|---|-------------|---|--|---|----------------|---|---|
| IP54 | - | RFL4DM | - | TRIM | - | INTENSITY | - | VOLTAGE | - | *ACCESSORIES |
| | | | | W=white | | WW27=2700K, 550 lm WW30=3000K, 590 lm WW40=4000K, 660 lm | | 120 | | RFL4DM-N=brushed nickel trim ring RFL4DM-B=black trim ring |

Note: * Sold separately.

Features + Specifications

Intended Use:

- Building interior/exterior
- Direct mount into 4" octagon electrical boxes
- Wet location listed (ceiling mount)
- Unit is FIRE rated when mounted to a fire rated octagon box

Construction:

- One piece die-cast body with heat sink
- High Impact opal PMMA lens sealed to die-cast body
- Snap on trim rings

Finish:



- W = white trim ring (standard with unit)
- Brushed Nickel and black color trim rings sold separately

Optical System:

- Mid power SMDs light engine
- Factory sealed with opal PMMA lens
- 8W system watt
- SMDs color 2700K, 3000K & 4000K CCT
- 80+CRI, 110 degrees beam spread
- 30000 hrs L70 with >50000 hrs life rating

Electrical System:

- On board direct AC drive system
- HPF with low THD
- 120V line dimmable
- Energy Star listed

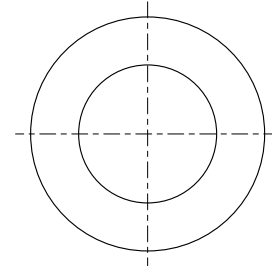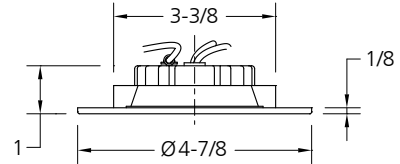

Mounting:

- Direct surface mount flush to ceiling
- Mounts to deep octagon electrical box
- Metal octagon boxes such as 54171K, 54171LB or equivalent
- Plastic boxes such as W-OCT, FW-OCT or equivalent
- Metal concrete box such as 54571 or equivalent
- Plastic Kwikon SMB slab boxes by IPEX or equivalent

Certified to CSA C22.2 No.250.0 Conformed to UL 1598
Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com



Right reserved for material and spec modification without prior notice.

Datecode 20190213

Warranty - Up To 3 Years