



PSCV-2496-5N1

Project:	Type:	QTY:
Product Code:		



Features + Specifications

Application:


- Indoor or outdoor use
- Damp location, mounts in any direction
- Wet location, only one direction (junction box downwards)

Construction:

- Die-punched and die-formed CRS
- Joints are interlock and spot welded
- Post paint with powder coast paint
- Electronics are fully potted to stabilized internal temperature

Electrical System:

- 120-277V AC input voltage
- 96W 24V DC 4 A output
- Constant voltage class 2 output
- HPF, low THD, RoHS compliant
- 5 in 1 dimming technology
- 120V leading/trailing edge phase dimming
- 10V PWM signal dimming
- 0-10V dimming
- 1-10V dimming
- Potentiometer dimming

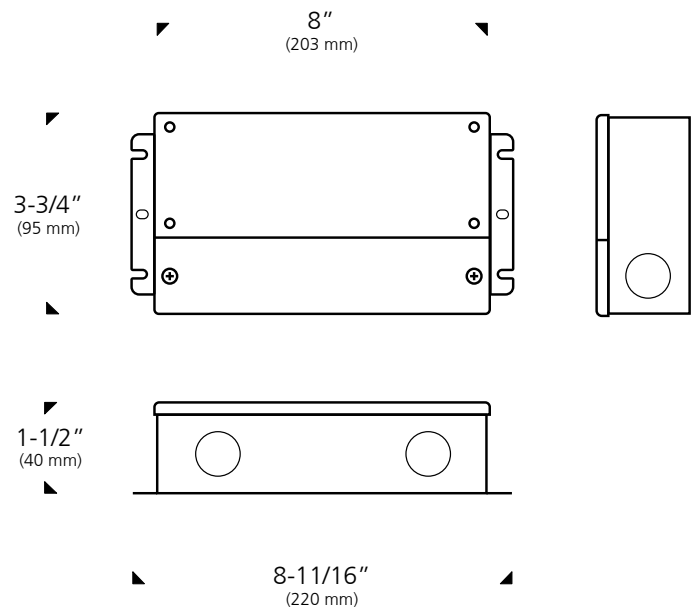

Right reserved for material and spec modification without prior notice

Datocode 20230124



Certified to C22.2 No. 250.0 Conformed to UL 1598 | Certification marks (where applicable) will be found on our luminaires and its components

www.iplighting.com

